

Technical Data Sheet

CODE 60621

GORDON C40/16" N

Oscillating table, wall-mounting and pedestal fans



Certifications




IMQ Performance



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,19	Airflow speed at max speed (m/s)	1,61
Absorbed Power max (W)	40	Delivery max (m ³ /h)	4000
Frequency (Hz)	50/60	Delivery max (m ³ /min)	66,67
Insulation Class	II°	giri_minuto	1145
Max. absorbed power at max speed (W)	40	RPM	1145
Voltage (V)	220-240	Service value (m ³ /min)/W	1,667
Weight (Kg)	5,4	Sound power level Lw [dB(A)]	57,2

DIMENSIONS

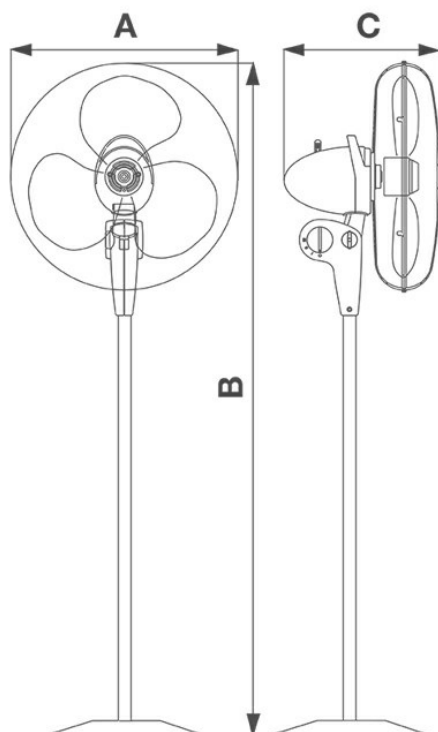

Size A (mm)	Ø
Size B (mm)	min
	1480
	max
	1993
Size C (mm)	420

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 60621

GORDON C40/16" N

Oscillating table, wall-mounting and pedestal fans



DESCRIPTION

- Material: plastic resin able to withstand aging induced by exposure to sunlight (UV-resistant), and formulated with an antistatic compound to prevent accumulation of dust, colour black.
- Nominal diameter 400 mm
- 3 speed asynchronous motor with thermal overload protection and shaft turning in self-aligning and self-lubricating bushings, coupled to oscillating mechanism generating movement through an angle of approx 90° maximum
- Motor housing equipped with hinge and clamp knob for adjustment of tilt angle.
- On/off switch and speed selector (rotary control incorporated into rear of motor housing)
- Equipped with stretch spiral power cord including plug.
- Maximum air flow 4,000 m3/h
- IMQ SAFETY and IMQ PERFORMANCE certifications

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com